

CORE CABLES PRODUCT DATA SHEET

PVC Flat (TPS) 2 Core + Earth

2.5mm 2C&E Flat White



ABN: 11 681 046 659

Phone: 1300 846 353


info@corecablesaustralia.com

2X2.5mm² + E PVC Flat Red Black Cores with White Sheath

DESCRIPTION

- 2 core + earth flat,
- 450/750V V-90 insulated,
- 90°C PVC sheathed to AS/NZS 5000.2,
- Copper conductors.

Twin & Earth, Flats, TPS

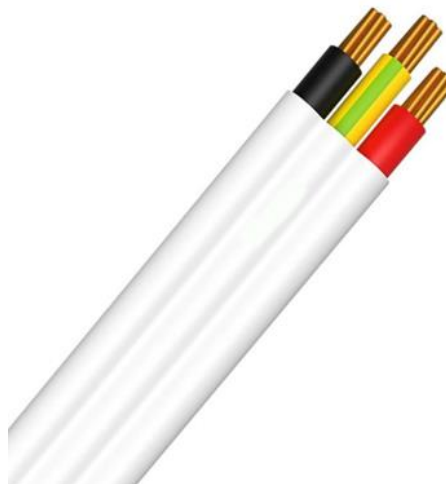

STANDARDS

National AS/NZS 1125; AS/ NZS 5000.2

CORE CABLES PRODUCT DATA SHEET

PVC Flat (TPS) 2 Core + Earth

2.5mm 2C&E Flat White



ABN: 11 681 046 659

Phone: 1300 846 353

info@corecablesaustralia.com

CONSTRUCTION CHARACTERISTICS

Colour	White Sheath / Green Yello Earth / Black / Red
Conductor flexibility	Class 2
Conductor material	Copper
Conductor shape	Circular
Insulation	V-90
Outer sheath	PVC
Type of conductor	Stranded copper
With Green/Yellow core	Yes

DIMENSIONAL CHARACTERISTICS

Approximate weight	14 kg/100m
Cable length	100m
Conductor cross-section	2.5 mm ²
Earth conductor cross section	2.5 mm ²
Nominal insulation thickness	0.7 mm
Nominal outer sheath thickness	1.0 mm
Nominal overall diameter	12.2 x 5.4
Number of cores	2
Number of earth cores	1

ELECTRICAL CHARACTERISTICS

Conductor AC resistance at 50 Hz	7.41 Ohm/km
Rated Voltage U ₀ /U (Um)	450/750 V